INFINITY ALL IN ONE 10

Šok komora izrađena od S/S AISI305 na točkovima ili nogicama sa integrisanom kondezacionom jedinicom, za GN1/1 ili EN400x600 posude. Kontrolni panel od 9 inča osetljiv na dodir. Dostupni programi (automatski I manuelno podesivi): Šok hlađenje, Šok zamrzavanje, Otapanje, Sporo kuvanje, Kvašenje, Kombinovani ciklus. Multilevel funkcija, funkcija odmrzavanja, SD kartica sa video tutorijalima i vrata sa USB portom za prenos HACCP podataka, sonda za merenje temperature (4 tačke za očitavanje). Opciono: EvoCloud, led svetlo, zamenjivi filter, sterilizator, Wi-fi sonda. Police i posude za sladoled (5l – 360x165xH20mm) nisu uključene u standardnoj ponudi.

S/s AISI304 Blast chillers on castors or feet, with integrated or remote condensing unit, for GN1/1 or EN400x600 (Mod.-P only EN400x600) shelves. Touch control system 9". Available cycles (automatic and manual customizable): Blast Chilling, Shock freezing, Thawing, Slow cooking, Proving, Comby cycles. Multilevel function, defrosting function, SD CARD with tutorial videos and USB door for HACCP data download, multipoint core probe (4 reading points). Optional: EvoCloud led light, Removable filter, Sterilizer, Tracer, Supervisor, Wi-fi probe, Hot probe. Shelves and icecream pans (5l 360x165xH20mm) not included.

Maksimalan broj polica za / Maximum Shelves N°: **10 GN1/1 H65mm – 14 EN600X400 (Pastry H40mm)**
Maksimalne dimenzije posuda za sladoled / Maximum Pans N°: **15 (5l 165x360xH120 mm)**

Dimenzije / Dimension Data

Spoljašnje dimenzije (mm) (ŠxDxV) External dimensions (mm) (WxDxH)	**790x839x1650**
Unutrašnje dimenzije (mm) (ŠxDxV) Internal Dimensions (mm) (WxDxV)	**668x418x791**
Dimenzije upakovane mašine (mm) (ŠxVxH) Packing Dimensions (mm) (WxDxH)	**830x860x1780**
Debljina izolacije (mm) Insulation Thickness (mm)	**60**
Unutrašnja zapremina (l) Internal Volume (l)	**220**
Bruto težina (kg) Gross Weight (kg)	**190**
Neto težina (kg) Net Weight (kg)	**180**

Tehnički podaci / Technical Data

Napajanje (V/Ph/Hz) Power supply (V/Ph/Hz)	**400/3/50**
Nominalna potrošnja energije (W) Nominal power consuption (W)	**1600***
Energetska klasa Energy power consumption (W)	**A+++**
Kapacitet šok hlađenja (kg)* Blast chilling yield (kg)***	**45**
Kapacitet šok hlađenja (kg)* Shock freezing yield (kg)***	**30**
0Kompresor Compressor	**H201CS**
Buka (db) 5m Rumore (db) 5m	**60**
Maksimalna absorbovana struja (A) Maximum absorbed current (A)	**7,4**
Klimatska klasa Climatic Class	**5 (40°C – 40%)**
Snaga hlađenja (W) Reftigerating power (W)	**1860*** **4770****
Gas	**R452A – GWP2141 – Kg 1,50**
Kontroler Controller	**TOUCH SCREEN OD 9"**

* (-30/+45° C), **(-10/+45° C)

*** Kapaciteti šok hlađenja i zamrzavanja su izraženi u kilogramima i nisu obavezujući. Vreme hlađenja hrane zavisi od njenog sastava i veličine. Stvarno vreme hlađenja za različite namirnice se može razlikovati od naznačenog.

Sva tehnička specifikacija je sklona promenama, bez prethodne najave. / All specification are subject to change without notice.

Pak sistemi doo, Bajči Žilinskog 5, Novi Sad, tel: 021/661 44 69, web: www.paksistemi.com

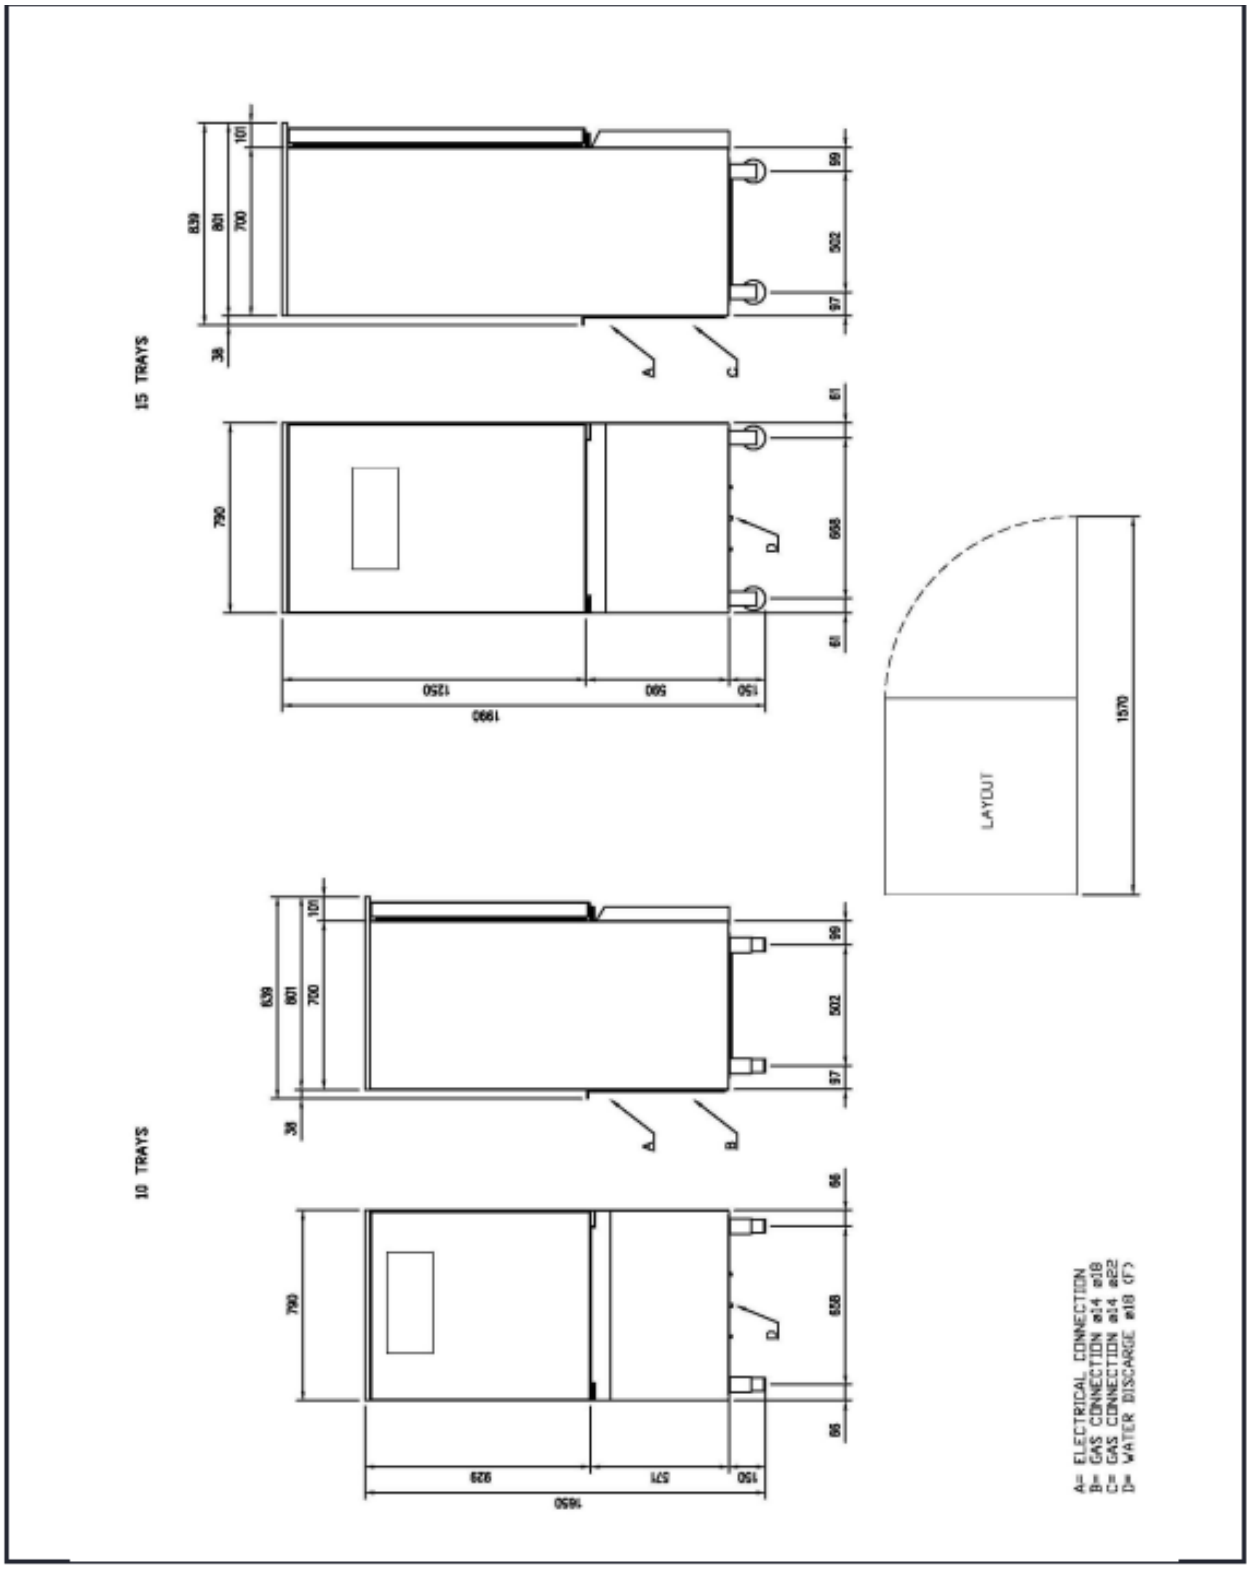

Sva tehnička specifikacija je sklona promenama, bez prethodne najave. / All specification are subject to change without notice.

Pak sistemi doo, Bajči Žilinskog 5, Novi Sad, tel: 021/661 44 69, web: www.paksistemi.com