

INFINITY START 15



Šok komora izrađena od S/S AISI305 na točkovima ili nogicama sa integrisanom kondezacionom jedinicom, za GN1/1 ili EN400x600 posude. Kontrolni panel od 9 inča osetljiv na dodir. Dostupni programi (automatski i manuelno podesivi): Šok hlađenje, Šok zamrzavanje, Otapanje, Kombinovani ciklus. Multilevel funkcija, funkcija odmrzavanja, SD kartica sa video tutorijalima i vrata sa USB portom za prenos HACCP podataka, sonda za merenje temperature (4 tačke za očitavanje). Opciono: EvoCloud, led svetlo, zamenjivi filter, sterilizator, Wi-fi sonda. Police i posude za sladoled (5l – 360x165xH20mm) nisu uključene u standardnoj ponudi.

S/s AISI304 Blast chillers on castors or feet, with integrated or remote condensing unit, for GN1/1 or EN400x600 (Mod.-P only EN400x600) shelves. Touch control system 9". Available cycles (automatic and manual customizable): Blast Chilling, Shock freezing, Thawing, Comby cycles. Multilevel function, defrosting function, SD CARD with tutorial videos and USB door for HACCP data download, multipoint core probe (4 reading points). Optional: EvoCloud, led light, Removable filter, Sterilizer, Tracer, Supervisor, Wi-fi probe, Hot probe. Shelves and icecream pans (5l - 360x165xH20mm) not included.

**Maksimalan broj polica za / Maximum Shelves N°: 15 GN1/1 H65mm – 19 EN600X400 (Pastry H40mm)
Maksimalne dimenzije posuda za sladoled / Maximum Pans N°: 21 (5l 165x360xH120 mm)**

Dimenzije / Dimension Data

Spoljašnje dimenzije (mm) (ŠxDxV) External dimensions (mm) (WxDxH)	790x839x1990
Unutrašnje dimenzije (mm) (ŠxDxV) Internal Dimensions (mm) (WxDxV)	668x418x1110
Dimenzije upakovane mašine (mm) (ŠxVxH) Packing Dimensions (mm) (WxDxH)	830x860x2120
Debljina izolacije (mm) Insulation Thickness (mm)	60
Unutrašnja zapremina (l) Internal Volume (l)	310
Bruto težina (kg) Gross Weight (kg)	240
Neto težina (kg) Net Weight (kg)	228

Tehnički podaci / Technical Data


Napajanje (V/Ph/Hz) Power supply (V/Ph/Hz)	400/3/50
Nominalna potrošnja energije (W) Nominal power consumption (W)	2390*
Energetska klasa Energy power consumption (W)	A+++
Kapacitet šok hlađenja (kg)*** Blast chilling yield (kg)***	70
Kapacitet šok hlađenja (kg)*** Shock freezing yield (kg)***	50
OKompresor Compressor	H300cs
Buka (db) 5m Rumore (db) 5m	70
Maksimalna absorbovana struja (A) Maximum absorbed current (A)	10,5
Klimatska klasa Climatic Class	5 (40°C – 40%)
Snaga hlađenja (W) Reftigerating power (W)	3060* 7750**
Gas	R452A – GWP2141 – Kg 2,20
Kontroler Controller	TOUCH SCREEN OD 9"

* (-30/+45° C), ** (-10/+45° C)

*** Kapaciteti šok hlađenja i zamrzavanja su izraženi u kilogramima i nisu obavezujući. Vreme hlađenja hrane zavisi od njenog sastava i veličine. Stvarno vreme hlađenja za različite namirnice se može razlikovati od naznačenog.

Sva tehnička specifikacija je sklona promenama, bez prethodne najave. / All specification are subject to change without notice.

Pak sistemi doo, Bajči Žilinskog 5, Novi Sad, tel: 021/661 44 69, web: www.paksistemi.com

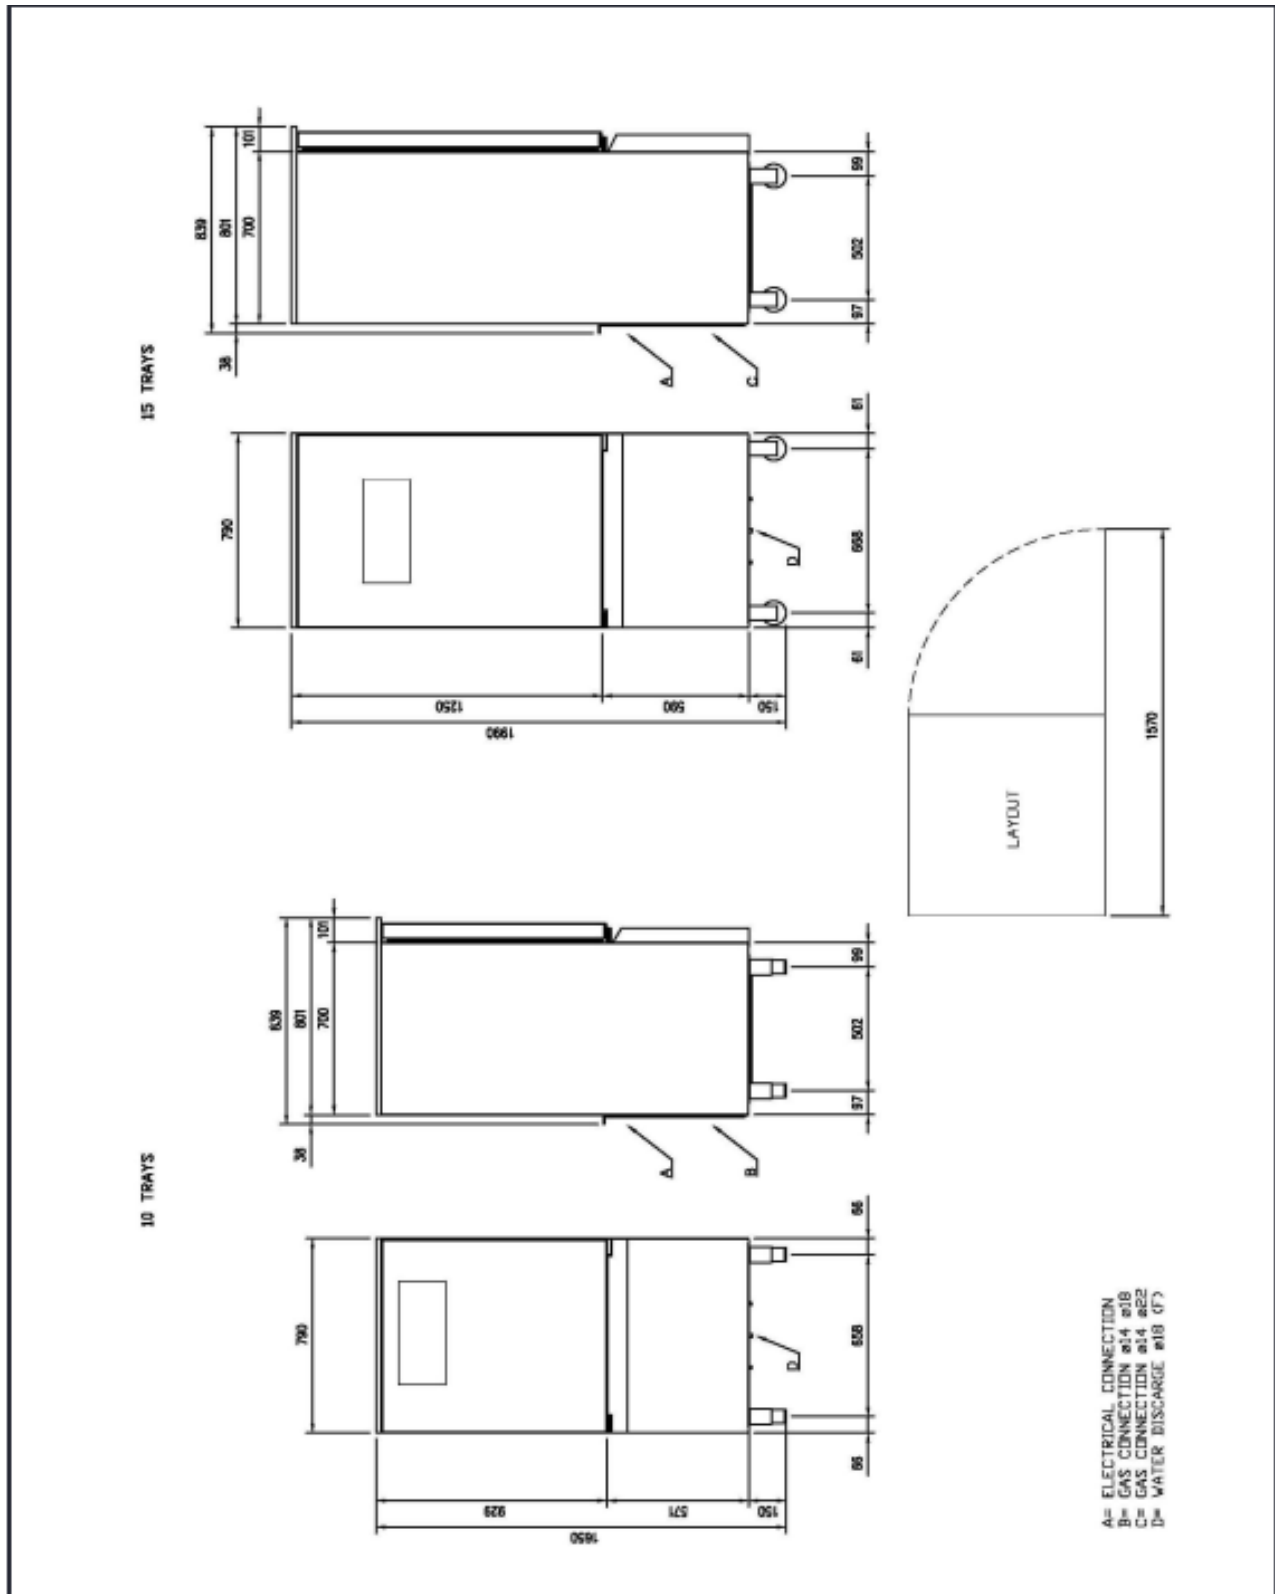

Sva tehnička specifikacija je sklona promenama, bez prethodne najave. / All specification are subject to change without notice.

Pak sistemi doo, Bajči Žilinskog 5, Novi Sad, tel: 021/661 44 69, web: www.paksistemi.com